


ROLL UP WIRED - R28WT


Technical Features

- Voltage Supply: 24V DC
- Index Protection Rating: IP 30
- Limit Switch Type: Electronic
- Limit Switch Capacity: 60 Turns
- Temperature Working Range: 14° F to 185° F (-10° C to 85° C)
- Insulation Class: Class III

Dimensions (mm)

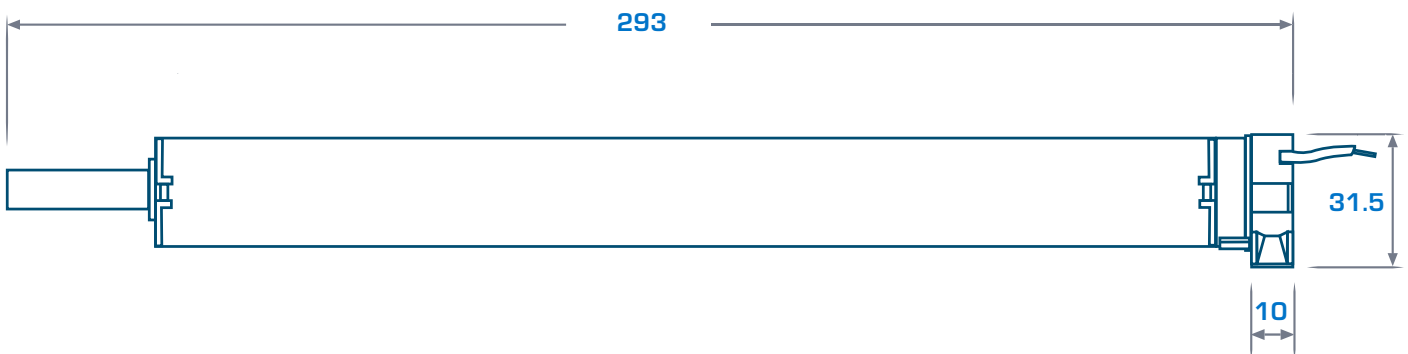


FLUSH MOUNT



PIN MOUNT



STAR MOUNT



* Parallel wiring of motors is prohibited without the use of an isolation controller, eg. 4AC Motor Controller, 4 Motor Group Controller, etc. Direct switching of a 230V motor must always be done via a mechanical interlock.

240V RTS HARDWIRED CONTROL MOTOR

PERFORMANCES	ROLL UP WIRED R28 WT
VOLTAGE	24V DC
TORQUE	0.8 Nm
OVER CURRENT PROTECTION	1A
*SOUND LEVEL	48 dBA - 57dBA
SPEED	30 rpm

* According to standards ISO 3741 NF 31022 in dB(A) ref. IPW

Included Cables

24V DC POWER CABLE (attached to motor) - Male JST Connector 11.8 in. (300 mm) Length

24V DC EXTENSION CABLE - Female JST Connector 86.6 in. (2200 mm) Length

Normal functioning temperature: 0°C to +60°C