



MARINE HEAT & GLARE CONTROL WINDOW FILMS

TYPE APPROVED SOLAR FILM TECHNOLOGY
FOR NON-NAVIGATIONAL SHIP WINDOWS



MARINE HEAT & GLARE CONTROL WINDOW FILMS

SOLAR FILM TECHNOLOGY FOR NON-NAVIGATIONAL SHIP WINDOWS

Solarglide's Solar Film range is the perfect solution to keep your vessel, crew and passengers cool in even the hottest of environments. Easily applied to window interiors, the films reduce solar heat and glare while leaving the windows totally transparent.

The film range will reduce interior heat onboard considerable, limiting the need for air-conditioning units to be working at full capacity – it's a winner all round.

Ideal for crew areas, cabins and non-navigational windows, the films come in a range of three colours: reflective silver, low mirror neutral grey and low mirror bronze. There will be something to suit every style of interior.



THE DETAILS AND THE BENEFITS?



AVAILABLE BY
THE ROLL, BY
THE METRE OR
CUT TO SIZE



AN INCREDIBLY
COST-EFFECTIVE
ALTERNATIVE
TO BLINDS AND
CURTAINS



AVAILABLE IN
914MM, 1219MM,
1524MM OR
1828MM WIDTHS



EACH COLOUR
COMES IN A CHOICE
OF SHADES – 20
(DARKEST), 35 AND 50
(ALLOWING THE MOST
LIGHT THROUGH)



ALL OFFER
CLEAR VISIBILITY
DURING DAYLIGHT
HOURS




99% UV REDUCTION,
KEEPING YOUR
INTERNAL
FURNISHINGS SAFE
FROM SOLAR FADING



EACH COMES WITH
A 10-YEAR PRODUCT
WARRANTY WHEN
INSTALLED BY
A SOLARGLIDE
ENGINEER



SOLARGLIDE'S
FILMS ARE
FOR INTERNAL
INSTALLATION
ONLY

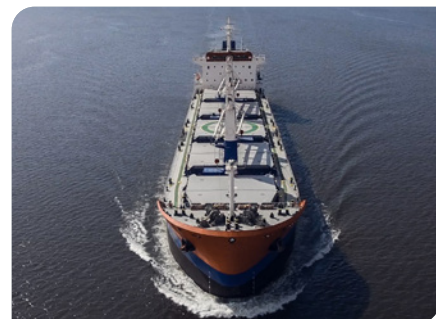

We also offer a survey, installation and removal of old existing film service for those who need extra support. But if you're hoping to fit the films yourself, we provide a comprehensive installation guide and kit to keep you right.

Want to find out more? Contact our expert team to decide which colour and shade combination would suit your needs.




PERFORMANCE STATISTICS

We offer three Colours and three shade options including our Lloyds Register Type Approved 'Low mirrored neutral grey range.




Film Type/Description	Roll Length	Solar Energy Transmitted %	Solar Energy Reflected %	Solar Energy Absorbed %	Visible Light Transmission %	UV Rejection %	Glare Reduction %	Total Solar Energy Rejected %
Reflective Silver 20 Solar Film	30.48m	13%	52%	35%	16%	99%	82%	78%
Reflective Silver 35 Solar Film	30.48m	21%	42%	37%	30%	99%	66%	69%
Reflective Silver 50 Solar Film	30.48m	33%	30%	37%	47%	99%	47%	54%
Low Mirror Neutral Grey 20 Solar Film TA	30.48m	14%	27%	59%	18%	99%	80%	70%
Low Mirror Neutral Grey 35 Solar Film TA	30.48m	26%	22%	52%	35%	99%	60%	61%
Low Mirror Neutral Grey 50 Solar Film TA	30.48m	39%	21%	40%	48%	99%	45%	50%
Low Mirror Bronze 20 Solar Film	30.48m	15%	42%	43%	20%	99%	77%	75%
Low Mirror Bronze 35 Solar Film	30.48m	25%	35%	40%	40%	99%	55%	55%

COLOUR RANGE

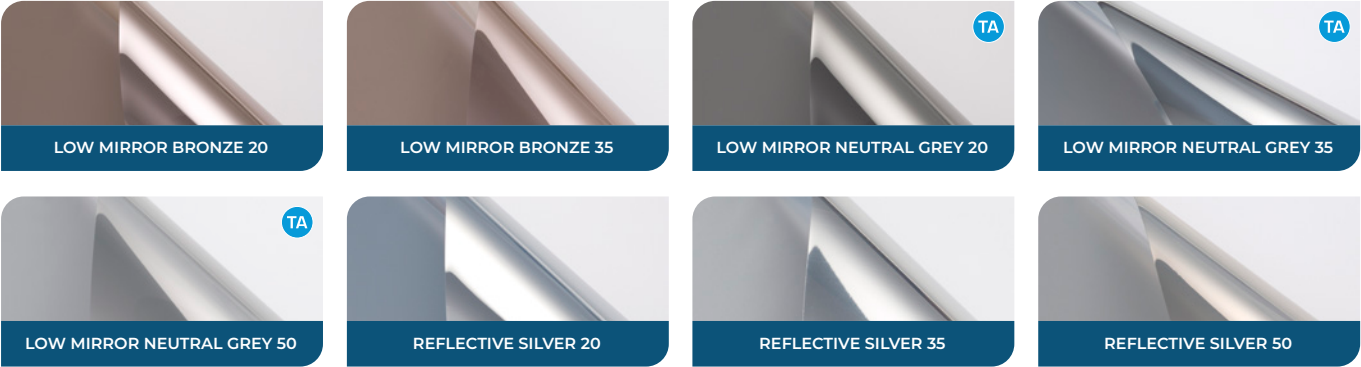


SOLAR FILM ROLL WIDTHS

Four widths of solar film available

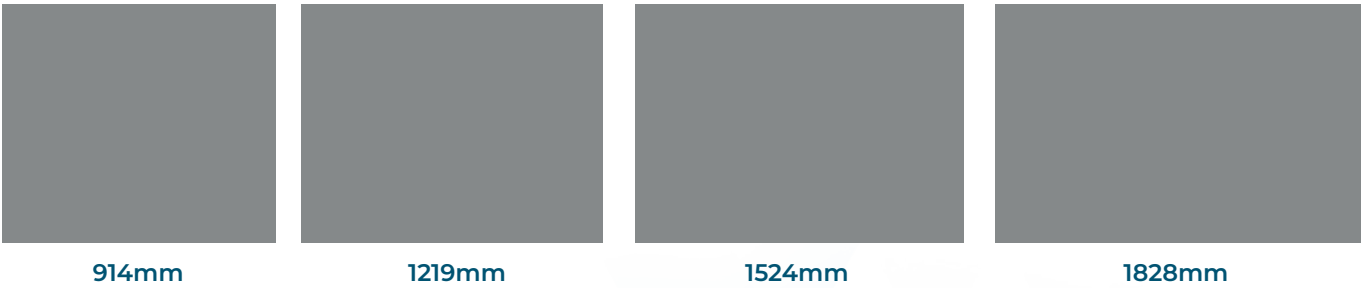

FILM CUTTING OPTIONS

Three choices

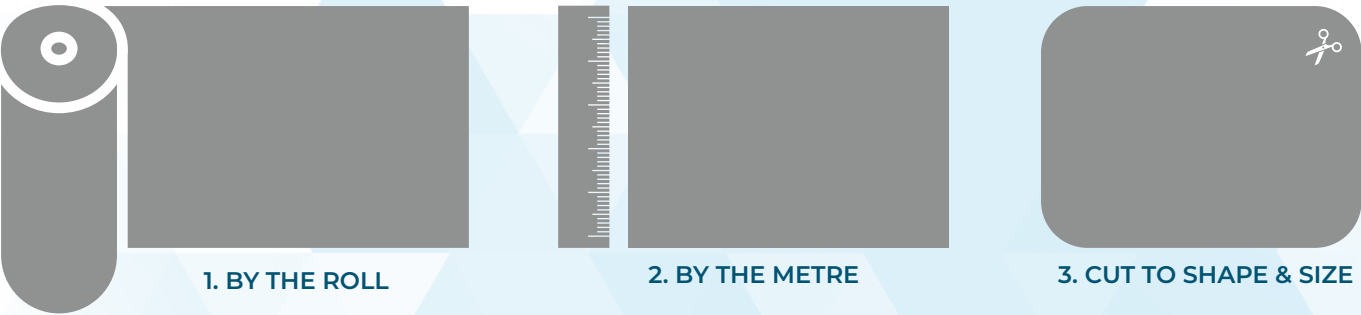

SOLAR FILM SHADING EXPLAINED

Three shades 20, 35 & 50





Solarglide Ltd.

Unit 8 The Stottie Shed
Bakers Yard
Christon Road
Gosforth
Newcastle upon Tyne
Tyne and Wear
NE3 1XD
United Kingdom



+44 191 5970543



theteam@solarglide.com



www.solarglide.com

