

CARNIVAL BLACKOUT BLIND RANGE


Blackout Fabric • 10 Colours • FR



Carnival blackout fabric has been specially treated to not only prevent mould, but to eliminate bacteria and fungi. Our exceptional fabric also prevents pollen from entering the ship, whilst in port or at sea - a valuable asset to hay fever sufferers who experience disruptive sleep.

Carnival fabric blocks out up to 100% of sunlight through the material, it offers 99% UV protection and 0% Light Transmission. Furthermore, it conforms to flame retardancy BS5867, Part 2: Type B 2008.


**IMO FR
FABRICS**

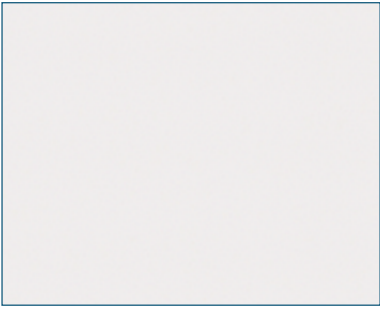

CHINA WHITE



IVORY

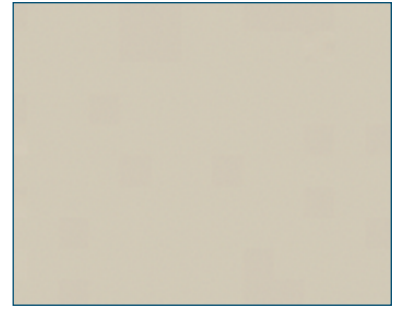


PAPAYA



CREAM



DUSK

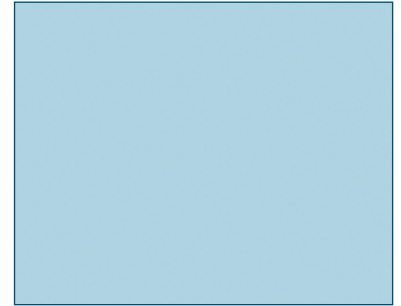


GLACIER



WISTERIA



LUNA

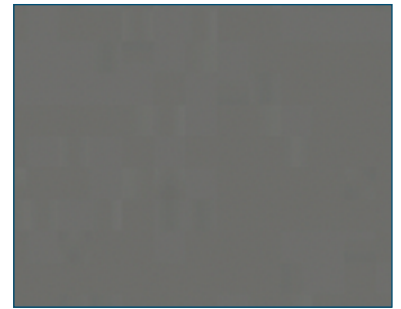

SHADOW



RAVEN

CARNIVAL BLACKOUT

Fabric Composition

100% Polyester

Fabric Width

2.05m (80")

Fabric Weight

449g/m² (13.2oz/yd²)

Properties



FR



Wipe Clean



100%

Flammability Standards

Carnival Blackout meets FR standard BS 5867 Part 2 Type B. Further information is available on request

Colour Fastness

Tested in accordance with BS EN ISO 105-B01:1999

Cleaning

Carnival Blackout fabrics can be wiped clean. See manufacturers instructions. Tested in accordance with BS EN 26330:1994 method 7a

Solar, Optical & Colour Fastness Properties

	Solar			Optical			UV Block	SC	CF	Dim Out
	T _s	R _s	A _s	T _o	R _o	A _o				
China White	0	78	22	0	87	13	100	0.25	4	5
Cream	0	76	24	0	83	17	100	0.27	5+	5
Dusk	0	68	32	0	60	40	100	0.34	4	5
Glazier	0	68	32	0	67	33	100	0.34	4	5
Ivory	0	75	25	0	81	19	100	0.28	5	5
Luna	0	64	36	0	59	41	100	0.38	4	5
Papaya	0	70	30	0	73	27	100	0.32	5	5
Raven	0	33	67	0	32	68	100	0.68	4	5
Shadow	0	42	58	0	43	57	100	0.59	5+	5
Wisteria	0	68	32	0	67	33	100	0.34	4	5

T: % Transmittance
R: % Reflectance
A: % Absorption

UV Block: the % of UV light blocked by the fabric
SC: Shading Co-efficient
CF: Colour Fastness

Dim Out:
1 - High light Penetration
4 - Low Light Penetration
5 - Blackout



+44 191 5970543



theteam@solarglide.com



www.solarglide.com