




MICRO BLIND DIMOUT RANGE

Dimout Fabric • 10 Colours • FR

MICRO BLIND - DIMOUT COLOUR RANGE

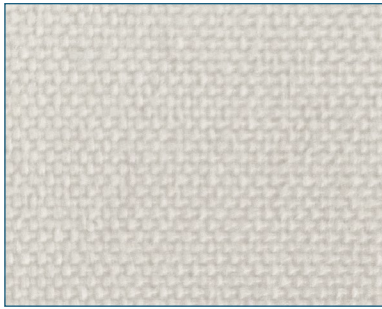


Lotus




Albatross




Wedgewood

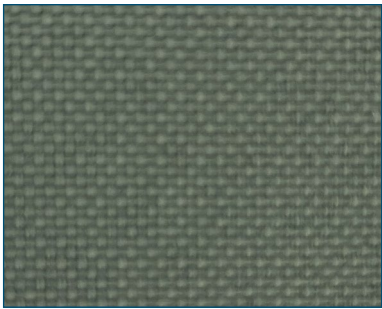


Lovett

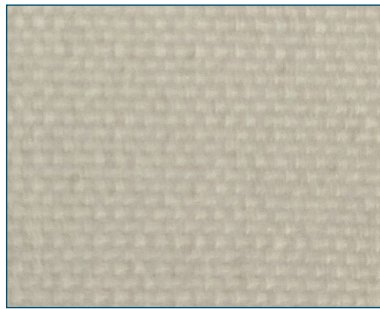


Jasmine

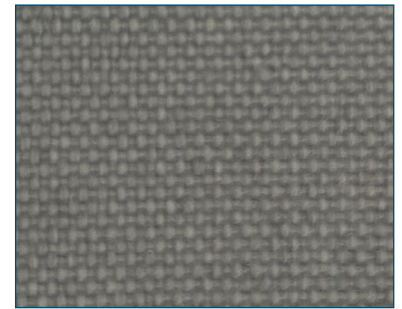


Mercury

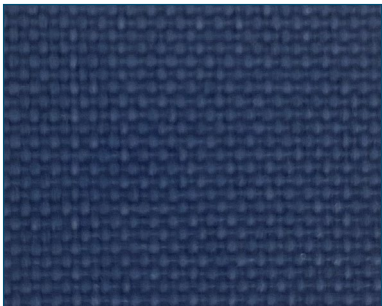


Royal Blue

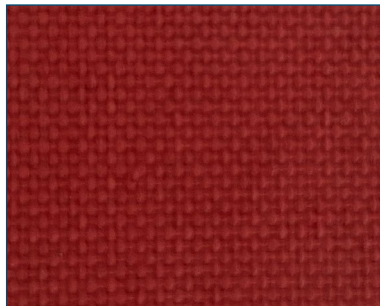

Scarlet

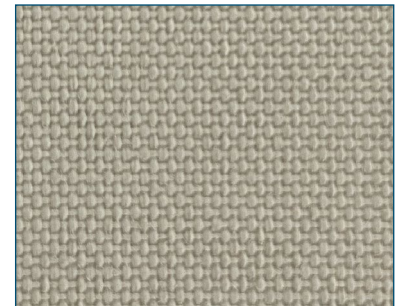

Sandstone

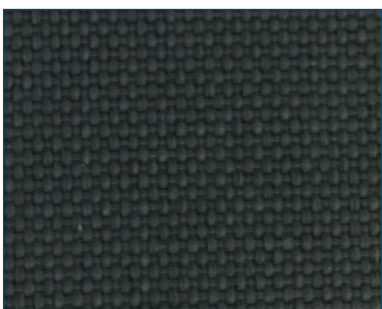

Charcoal

Technical Data

DIMOUT FABRIC	
Composition	100 % Polyester
Width	2.10m (82.7")
Weight	290g/m ² (8.55oz/yd ²)
Flammability Standards	Meets FR standard BS 5867 Part 2 Type B. Further information is available on request.
Colour Fastness	Tested in accordance with BS EN ISO 105-B01:1999
Cleaning	Can be wiped clean. Tested in accordance with BS EN 26330:1994 method 7a



FR



Wipe Clean



100%

Solar, Optical & Colour Fastness Properties

	Solar			Optical			UV Block	SC	CF	Dim Out
	T _s	R _s	A _s	T _o	R _o	A _o				
Albatross	8	68	24	2	62	36	100	0.34	5	3
Charcoal	5	46	49	0	24	76	100	0.56	6	3
Jasmine	10	79	11	9	86	5	100	0.24	6+	3
Lotus	14	80	6	14	86	0	100	0.23	6+	3
Lovett	6	55	39	2	39	59	100	0.47	6	3
Mercury	7	57	36	1	38	61	100	0.45	5	3
Royal Blue	5	45	50	0	23	77	100	0.57	6	3
Sandstone	10	46	44	5	24	71	100	0.56	6	3
Scarlet	4	48	48	1	24	75	100	0.54	6+	3
Wedgewood	7	54	39	1	36	63	100	0.48	6+	3

T: % Transmittance
R: % Reflectance
A: % Absorption

UV Block: the % of UV light blocked by the fabric
SC: Shading Co-efficient
CF: Colour Fastness

Dim Out:
1 - High light Penetration
4 - Low Light Penetration
5 - Blackout



+44 191 5970543



theteam@solarglide.com



www.solarglide.com