

## **SOMFY 24V ROLL UP WIRED - R28WT**

### **Technical Features**

Voltage Supply: 24V DC

Index Protection Rating: IP 30


• Limit Switch Type: Electronic

Limit Switch Capacity: 60 Turns

• Temperature Working Range: 14° F to 185° F (-10° C to 85° C)

• Insulation Class: Class III

## **Dimensions (mm)**

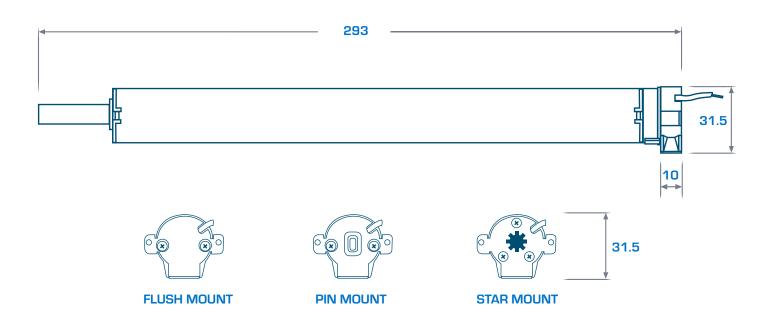



# **240V RTS HARDWIRED CONTROL MOTOR**

PERFORMANCES	ROLL UP WIRED R28 WT
VOLTAGE	24V DC
TORQUE	0.8 Nm
OVER CURRENT PROTECTION	1A
*SOUND LEVEL	48 dBA - 57dBA
SPEED	30 rpm

<sup>\*</sup> According to standards ISO 3741 NF 31022 in dB(A) ref. IPW

#### Included Cables

24V DC POWER CABLE (attached to motor) - Male JST Connector 11.8 in. (300 mm) Length 24V DC EXTENSION CABLE - Female JST Connector 86.6 in. (2200 mm) Length

Normal functioning temperature:  $0^{\circ}$ C to  $+60^{\circ}$ C